

[]

INTEROPERABILITY REPORT

Ascom IP-DECT

Innovaphone, version 9.00 hotfix 15

IP PBX Integration (H323)

Ascom IPBS, Software version 5.1.2

Ascom, Gothenburg

October 2012



TABLE OF CONTENT:

INTRODUCTION.....	3
SITE INFORMATION	4
Test Topology	4
SUMMARY	5
General Conclusions	6
TEST RESULTS.....	7
Known Issue(s):.....	7
Test Areas.....	8
APPENDIX A: TEST CONFIGURATIONS.....	9
Innovaphone IP302, version 9 hotfix 15	9
Ascom IP-DECT Base Station (IPBS)	17
APPENDIX B: DETAILED TEST RECORDS.....	21

INTRODUCTION

This interoperability report describes test results and optimal configuration of Ascom IP-DECT towards the Innovaphone IP PBX. The document should be used in conjunction with configuration guide(s) from Innovaphone and Ascom.

Ascom

Ascom Wireless Solutions is a leading provider of on-site wireless communications for key segments such as hospitals, manufacturing industries, retail and hotels. More than 75,000 systems are installed at major companies all over the world. The company offers a broad range of voice and professional messaging solutions, creating value for customers by supporting and optimizing their Mission-Critical processes. The solutions are based on VoWiFi, IP-DECT, DECT and Nurse Call and paging technologies, smartly integrated into existing enterprise systems.

Founded in the 1950s and based in Göteborg, Sweden, Ascom Wireless Solutions is part of the Ascom Group and listed on the Swiss Stock Exchange. The company has subsidiaries in 10 countries and approximately 1,200 employees worldwide.

For further information, see the following URL: <http://www.ascom.com/ws>.

Innovaphone

Innovaphone develops pure IP telephone systems under the name of "innovaphone PBX", uniting security and high availability with the flexibility and scalability of IP. The innovaphone PBX hardware comprises gateways and a series of IP telephones which are developed entirely in Germany and manufactured to a large extent in Europe. The entire product range is based on the unified hardware and software platform which is the core of the innovaphone product philosophy. The number of activated licenses can be determined as required which renders the solution suitable for companies of any size: from small companies over medium size companies with several branch offices to large enterprises. The innovaphone IP telephone systems are available exclusively through authorised distributors and resellers.

Innovaphone has been playing a decisive role in the development of IP telephony ever since the company was founded in 1997. Head office is located in Sindelfingen, South Germany.

For further information, see the following URL: <http://www.innovaphone.com/>


SITE INFORMATION

Test Site: Ascom HQ
Gothenburg
Sweden

Participant(s):

Raheleh Kamali (Ascom HQ, SE)

Test Topology

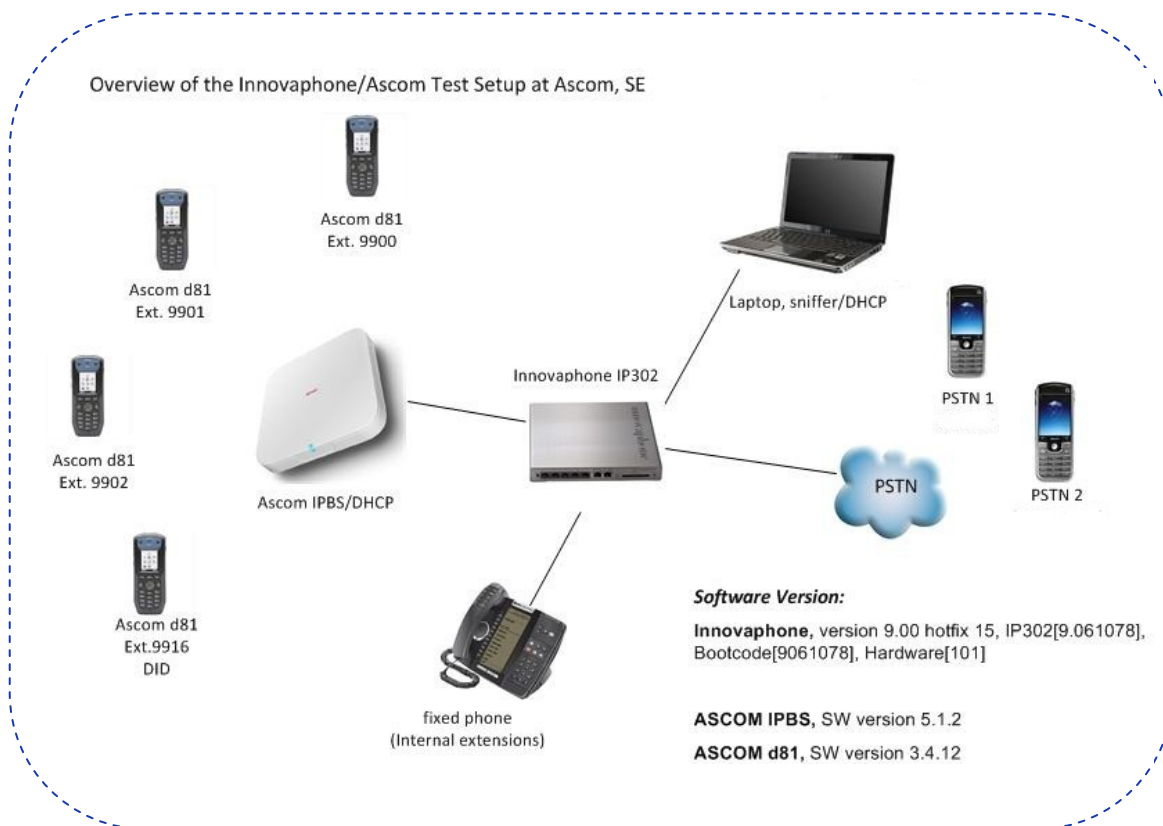

SUMMARY

Innovaphone, version 9 hotfix 15

Test cases in nearly all areas with regard to Ascom IP-DECT and Innovaphone IP PBX passed successfully.

Overall, the conclusion has to be that H.323 integration towards IP302 is very good.

Queries about licensing should be directed to Innovaphone.

Please also see “**APPENDIX A: TEST CONFIGURATIONS**” for further details.

IP-DECT

High Level Functionality	Result
Basic Call	OK ^b
DTMF	OK
Hold, Retrieve, Enquiry and Brokering	OK
Attended Transfer	OK
Blind-transfer	OK
Semi-attended Transfer	OK
Call Forward Unconditional	OK ^a
Call Forward No Reply	OK ^a
Call Forward Busy	OK ^a
Call Waiting	OK ^a
Message Waiting Indication	Not Tested
Do Not Disturb	OK
Calling Line/Name Identification	OK
Connected Line/Name Identification	OK

a. Tested with Supplementary Services enabled

b. See **Known Issue(s)** in page 7

General Conclusions

Ascom interoperability verification produced good results towards Innovaphone IP302 version 9 hotfix 15 with few exceptions, See **Known Issue(s)** in page 7.

IP-DECT was configured to register at the IP PBX using endpoint numbers. The codec of choice for these tests was G.711A/20ms, while DTMF signalling was transmitted through RTP. One can say that, in comparison to SIP, H.323 requires little configuration besides the IP address of the H.323 gatekeeper and abovementioned settings. Parameter settings are elaborated upon in the **"TEST RESULTS"** section for respective platforms.

Call waiting (CW), do-not-disturb (DND) and call diversion (CDIV) were tested with supplementary services enabled on the IP-DECT base station (IPBS). Practically all test cases regarding basic call, brokering/enquiry, transfer and CDIV passed with positive results. No issues were logged for follow-up at Ascom HQ.

TEST RESULTS

Innovaphone IP302, v 9 .00 hotfix 15

- Ascom IPBS, v 5.1.2
- Ascom d81, v 3.4.12

Signalling Protocol:

- H.323

Innovaphone IP302:

- Settings are based on "Ascom VoIP Gateway: Installation and Operation Manual" (TD 92326GB), pp. 62-100
- LDAP replication required between IP PBX and IP-DECT master
- DSCP should be configured appropriately under IP -> Settings

Ascom IPBS:

- "Endpoint ID" and "Endpoint Number" corresponds to name and number in the user object (Assigning password is optional, it works in both cases)
- "Enbloc Dialling" and "Allow DTMF through RTP" enabled

Known Issue(s):

- No timeout when DECT calls another DECT that does not answer (PBX issue, per design)
- Internal ring tone after external call is blind-transferred to C, which does not save external number in call list (per IPBS design)
- Ascom IP-DECT does not support post-dial (per design)
- Possible to divert call to "diverter" (calling party hears busy, minor issue)

Test Areas

Basic Call, DTMF: 94% pass (17/18)

- CNIP/CONP OK, requires IP PBX configuration
- DTMF OK
- Overlap sending (post-dial) not supported by Ascom d81
- DECT ignores DECT NOK (#5103.1), no timeout

Basic Call, Portable Unavailable: 100 % pass (8/8)

- Good results overall

Procedure Mapping: 100% pass (2/2)

- Test cases passed with supplementary services and LDAP replicator enabled
- “Enbloc dialing” and “Local R-Key Handling” are checked in IPBS

Three-party Services: 97% pass (40/41)

- CNIP/CONP OK (updated after transfer)
- CLIP/COLP could not be verified properly for PSTN
- A calling A is treated as any other call (#5126.1)

Call Diversion: 90% pass (9/10)

- Supplementary Services enabled
- Feature codes supported through IPBS
- Test case #5132.1 (Diversion to Diverter), it is possible to divert the phone to itself (minor issue).

Telephony Features: 100% pass (9/9)

- Limited testing due to lack of 3rd party competence
- DND OK, Supplementary Services enabled
- Group calls tested with good results
- MWI was not tested

Please keep in mind that metrics do NOT account for untested cases.

APPENDIX A: TEST CONFIGURATIONS

Innovaphone IP302, version 9 hotfix 15

Below one will find screen shots reflecting the management interface and some aspects of setting up the PBX application on the IP302.

General -> info

The screenshot shows the management interface for IGWP01: innovaphone IP302. The 'Info' tab is selected, displaying the following system information:

Version	9.00 hotfix15 IP302[9.061078], Bootcode[9061078], Hardware[101]
SerialNo	00-90-33-1e-02-fd (20)
DRAM	16 MB
FLASH	8 MB
Coder	4 Channels of G.711,G.729,G.723
Conference	0 Channels
HDLC	2 Channels
Sync	BRI1-L1
SNTP Server	10.11.24.243
Time	03.10.2012 16:15
Uptime	9d 1h 49m 55s
Test License	78 Hours remaining! Click here to extend

IP->Settings: DSCP markings used for signalling and RTP

The screenshot shows the management interface for IGWP01: innovaphone IP302, specifically the 'IP4' settings. The 'General' tab is selected, and the 'Routing' section is expanded to show DSCP markings and port settings.

Settings Routing

TOS Priority - RTP Data: 0xb8
TOS Priority - Signaling: 0x0

First UDP-RTP Port: Number of Ports: First/Last 16384 / 32767
First UDP-NAT Port: Number of Ports: First/Last 0 / 0

-Local Networks-

Address	Mask
<input type="text"/>	<input type="text"/>

-Private Networks-

Address	Mask
<input type="text"/>	<input type="text"/>

LDAP-> Server: Read-write account "ipdect" used for replication

IGWP01: innovaphone IP302

General Interfaces IP4 IP6 **Services** PBX Gateway Maintenance

HTTP NTP Sync Update Logging **LDAP** SNMP Telnet DNS

Server
Srv-Status
Replicator
Rep-Status
Expert

User	Password	Write Access
ldap-guest	<input type="checkbox"/>
ipdect	<input checked="" type="checkbox"/>
		<input type="checkbox"/>

- Allowed networks -

Address	Mask	Force TLS
10.11.24.0	255.255.255.0	<input type="checkbox"/>
		<input type="checkbox"/>

LDAP->Server-Status: Successful LDAP replication

IGWP01: innovaphone IP302

General Interfaces IP4 IP6 **Services** PBX Gateway Maintenance

HTTP NTP Sync Update Logging **LDAP** SNMP Telnet DNS

Server
Srv-Status
Replicator
Rep-Status
Expert

connections	3	
write connections	3	
rx search	793	
rx modify	17	
rx add	0	
rx del	0	
rx abandon	0	
tx notify	1105	
tx error	0	
tx error 49	0	(Invalid Credentials)
tx error 50	0	(Insufficient Access Rights)

PBX->General: General Settings

IGWP01: innovaphone IP302


General Interfaces IP4 IP6 Services **PBX** Gateway Maintenance

Config Objects Registrations Calls SOAP myPBX Dyn-PBXs

- General
- Security
- Filter
- myPBX
- Import
- Export

PBX Mode Master ▾

System Name Use as Domain

PBX Name

Unknown Registrations - With PBX Pwd only

Music On Hold URL

External Music On Hold

Response Timeout

Dial Complete Timeout

No of Regs w/o Pwd.

Recall Timeout

Max Call Duration (h)

Enable External Transfer

No CLIR on internal calls

RTP Proxy

Generate CDRs

Route Root-Node External Calls to on Master or Slave with License Only

Route PBX-Node External Calls to

Route Internal Calls to

Escape Dialtone from

Prefix for Intl/Ntl/Subscriber

Log Calls

Licenses

Name	Count	Usage	Local	Slaves
Port9	100	4	4	0
Standby9	100	100	100	0
Voicemail9	100	100	100	0
Mobility9	100	0	0	0
Operator9	100	0	0	0
SoftwarePhones9	100	0	0	0

PBX->Objects: PBX objects added to PBX application

IGWP01: innovaphone IP302

The screenshot shows a web-based configuration interface for a PBX system. At the top, there are navigation tabs: General, Interfaces, IP4, IP6, Services, **PBX**, Gateway, and Maintenance. Below these are sub-tabs: Config, **Objects**, Registrations, Calls, SOAP, myPBX, and Dyn-PBXs. On the left, a 'User' dialog box is open, showing a dropdown menu with 'new' and 'show' options. The main area displays a table of PBX objects.

Long Name	Name	No	HW-ID	Node	PBX	Filter	Groups	CF*
DECT				root	.		+	+
DECT2				root	.		+	+
EXTERN	EXTERN	EXTERN		root	.	normal	+	+
FE	9990	9990	9990	root	.		FE*	+
Miratel 6202	6202	6202	6202	root	.		+	+
Miratel 6212	6212	6212	6212	root	.		+	+
Miratel 6213	6213	6213	6213	root	.		+	+
Miratel 6221	6221	6221	6221	root	.		+	+
Miratel 6222	6222	6222	6222	root	.		+	+
Miratel 6223	6223	6223	6223	root	.		+	+
Miratel 6231	6231	6231	6231	root	.		+	+
serak 9900	9900	9900	9900	root	.		+	+
serak 9901	9901	9901	9901	root	.		+	+
serak 9902	9902	9902	9902	root	.		+	+
serak 9903	9903	9903	9903	root	.		+	+
serak 9904	9904	9904	9904	root	.		+	cfu:9906
serak 9905	9905	9905	9905	root	.		FE*	+
serak 9906	9906	9906	9906	root	.		FE*	+
serak 9907	9907	9907	9907	root	.		FE*	+

PBX->Objects: Adding a new DECT system

The screenshot shows a web browser window titled 'Dect System - Google Chrome'. The address bar contains the URL: 10.11.24.244/PBX0/ADMIN/mod_cmd_login.xml?cmd=show&user-guid=019fad78e909d311929a0090331e02. The page displays a configuration form for a DECT system under the 'General' tab. The form includes the following fields:

- Description:
- Long Name:
- Critical:
- PBX:

PBX->Objects: Adding a new user object

10.11.24.244/PBX0/ADMIN/mod_cmd_login.xml?cmd=show&user-guid=88ca04a6e909d31194e60090331e02fd&loc=*&filter=*&cor

General **User** DECT

Description Hide from LDAP

Long Name Display Name

Name Number Critical

Password retype Password

Node Local

PBX

Send Number URL

Group Indications

Config Template

- Devices -

Hardware Id	Name	PBX	Pwd No Filter
9900	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>

OK Cancel Apply Delete Help

PBX->Objects: Linking a user object to DECT system (IP-DECT only)

10.11.24.244/PBX0/ADMIN/mod_cmd_login.xml?cmd=show&user-guid=88ca04a6e909d31194e60090331e02fd&loc=*&filter=*&cor

General **User** **DECT**

Gateway

IPEI

Idle Display

AC

OK Cancel Apply Delete Help

PBX->Objects: Adding a gateway object ("EXTERN")

General
Gateway

Description Hide from LDAP

Long Name Display Name

Name Number Critical

Password retype Password

Node Local

PBX Reject ext. Calls

Max Calls Response Timeout

Reporting

- Devices

Hardware Id	Name	PBX	Pwd	No	Filter
EXTERN	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

OK
Cancel
Apply
Delete
Help

Gateway->GK: Binding an interface to the gateway object ("EXTERN")

IGWP01: innovaphone IP302

General Interfaces IP4 IP6 Services PBX Gateway Maintenance

General Interfaces SIP GK Routes CDR0 CDR1 Calls

Interface	CGPN-In	CDPN-In	CGPN-Out	CDPN-Out	Alias	Registration	Product
GW1		+					
GW2		+					
GW3		+					
GW4		+					
GW5		+					
GW6		+					
GW7		+					
GW8		+					
GW9		+					
GW10		+					
GW11		+					
GW12 EXTERN		+					EXTERN → 127.0.0.1

Gateway->GK: Registering the gateway in H.323

Name	EXTERN	
Disable	<input type="checkbox"/>	
Protocol	H323	
Mode	Register as Gateway	
Address	127.0.0.1	
Address	(alternate)	
Gatekeeper Identifier		
Local Signaling Port		
- Authorization -		
Password		Retype
- Alias List -		
Name	Number	
EXTERN		
- Media Properties -		
General Coder Preference	G711A	Framesize [ms] 20
Silence Compression	<input type="checkbox"/> Exclusive <input type="checkbox"/>	
Local Network Coder	G711A	Framesize [ms] 20
Silence Compression	<input type="checkbox"/>	
Enable T.38	<input type="checkbox"/> SRTP <input type="checkbox"/> No DTMF Detection <input type="checkbox"/> Enable PCM <input type="checkbox"/> Media-Relay <input type="checkbox"/>	
Record to (URL)		
- H.323 Interop Tweaks -		
No Faststart	<input type="checkbox"/> No H.245 Tunneling <input type="checkbox"/>	
Suppress HLC	<input type="checkbox"/> Suppress FTY <input type="checkbox"/> Suppress Subaddr <input type="checkbox"/>	
<input type="button" value="OK"/> <input type="button" value="Cancel"/> <input type="button" value="Apply"/> <input type="button" value="Delete"/> <input type="button" value="Help"/>		

PBX->Registrations: Overview of H.323 registrations

IGWP01: innovaphone IP302

General Interfaces IP4 IP6 Services **PBX** Gateway Maintenance

Config Objects **Registrations** Calls SOAP myPBX Dyn-PBXs

Address	Long Name	Name	No	Device	Product	Firmware	Uptime
127.0.0.1	H323	EXTERN	EXTERN	EXTERN	innovaphone IP302:IGWP01	9.00 hotfix15 [9.061078/9061078/101]	9d 2h 50m 27s
10.11.24.151	SIP	Test 24	9924	9924 9924	snom320	7.3.30	9d 2h 46m 37s
10.11.24.168	SIP	Test 25	9925	9925 9925	PolycomSoundPointIP-SPIP_335-UA.3.2.1.0078		9d 2h 50m 20s
127.0.0.1	H323	Test 29	9929	9929 9929	innovaphone IP302:IGWP01	9.00 hotfix15 [9.061078/9061078/101]	9d 2h 50m 27s

Gateway->Routes: Routing of incoming and outgoing calls

IGWP01: innovaphone IP302


General Interfaces IP4 IP6 Services PBX **Gateway** Maintenance

General Interfaces SIP GK **Routes** CDR0 CDR1 Calls

From	To	Counter	CGPN Maps
BRI1	03155 → GW12:EXTERN	i	→
GW12:EXTERN	→ BRI1	i	→ PBX to EXTERN
TEL1:tel1	→ RAB1:tel1	→	→
RAB1:tel1	→ TEL1:tel1	→	→

PBX->Registrations: Calling and called party number formats for incoming and outgoing calls

IGWP01: innovaphone IP302

 General
Interfaces
IP4
IP6
Services
PBX
Gateway
Maintenance

General
Interfaces
SIP
GK
Routes
CDR0
CDR1
Calls

Interface	CGPN-In	CDPN-In	CGPN-Out	CDPN-Out	State	Alias	Registration
TEL1	tel1	+			Up	9929:9929 →	127.0.0.1
TEL2		+			Up		
BRI1	n→	0	9916→	031559916	Up		
	i→	00	9915→	031559915			
TEST							
TONE							
HTTP							
ECHO							

Please refer to Innovaphone's documentation for further details about Innovaphone configuration and licensing.

Ascom IP-DECT Base Station (IPBS)

H.323 Settings

IP-DECT Base Station

Configuration

- General
- LAN
- IP
- LDAP
- DECT**
- VoIP
- UNITE
- Central Phonebook
- Administration
- Users
- Device Overview
- DECT Sync
- Traffic
- Gateway
- Backup
- Update
- Diagnostics
- Reset

System
Suppl. Serv.
Master
Mobility Master
Radio
Radio config
PARI
SARI
Air Sync

Mode Active

Multi-Master

Master ID 0

Enable PARI Function

IP-PBX

Protocol H.323

Gatekeeper IP Address 10.11.24.244

Alt. Gatekeeper IP Address

Gatekeeper ID

Max. Internal Number Length 4 used to decide internal/external ring signal

Enbloc Dialing

Enable Enbloc Send-Key

Send Inband DTMF

Allow DTMF Through RTP

Short Disconnect Tone

Configured With Local GK

Registration For Anonymous Devices

Registration Name / Number /

Deactivate Master If No Connection

Mobility Master

Name

Password

IP Address

Alt. IP Address

Status

OK
Cancel

Codec Settings

IP-DECT Base Station

Configuration

- General
- LAN
- IP
- LDAP
- DECT
- VoIP
- UNITE
- Central Phonebook
- Administration
- Users
- Device Overview
- DECT Sync
- Traffic
- Gateway
- Backup
- Update
- Diagnostics
- Reset

System	Suppl. Serv.	Master	Mobility Master	Radio	Radio config	PARI	SARI	Air Sync																				
<div style="border: 1px solid gray; padding: 5px;"> <div style="display: flex; justify-content: space-between;"> <div style="width: 60%;"> <p>System Name <input style="width: 100%;" type="text" value="DECT2"/></p> <p>Password <input style="width: 100%;" type="password" value="....."/></p> <p>Confirm Password <input style="width: 100%;" type="password" value="....."/></p> <p>Subscriptions <input style="width: 100%;" type="text" value="With System AC"/> ▼</p> <p>Authentication Code <input style="width: 100%;" type="text" value="1234"/></p> <p>Tones <input style="width: 100%;" type="text" value="EUROPE-PBX"/> ▼</p> <p>Default Language <input style="width: 100%;" type="text" value="English"/> ▼</p> <p>Frequency <input style="width: 100%;" type="text" value="Europe"/> ▼</p> <p>Enabled Carriers</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%; text-align: center;">0</td><td style="width: 10%; text-align: center;">1</td><td style="width: 10%; text-align: center;">2</td><td style="width: 10%; text-align: center;">3</td><td style="width: 10%; text-align: center;">4</td><td style="width: 10%; text-align: center;">5</td><td style="width: 10%; text-align: center;">6</td><td style="width: 10%; text-align: center;">7</td><td style="width: 10%; text-align: center;">8</td><td style="width: 10%; text-align: center;">9</td> </tr> <tr> <td style="text-align: center;"><input checked="" type="checkbox"/></td><td style="text-align: center;"><input checked="" type="checkbox"/></td><td style="text-align: center;"><input checked="" type="checkbox"/></td><td style="text-align: center;"><input checked="" type="checkbox"/></td><td style="text-align: center;"><input checked="" type="checkbox"/></td><td style="text-align: center;"><input checked="" type="checkbox"/></td><td style="text-align: center;"><input checked="" type="checkbox"/></td><td style="text-align: center;"><input checked="" type="checkbox"/></td><td style="text-align: center;"><input checked="" type="checkbox"/></td><td style="text-align: center;"><input checked="" type="checkbox"/></td> </tr> </table> <p>Local R-Key Handling <input checked="" type="checkbox"/></p> <p>No Transfer on Hangup <input type="checkbox"/></p> <p>No On-Hold Display <input type="checkbox"/></p> <p>Coder <input style="width: 100%;" type="text" value="G711A"/> ▼ Frame (ms) <input style="width: 100%;" type="text" value="20"/> Exclusive <input type="checkbox"/> SC <input type="checkbox"/></p> <p>Secure RTP <input style="width: 100%;" type="text"/></p> <p style="text-align: right;"> <input type="button" value="OK"/> <input type="button" value="Cancel"/> </p> </div> </div> </div>									0	1	2	3	4	5	6	7	8	9	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
0	1	2	3	4	5	6	7	8	9																			
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>																			

Supplementary Services Activated

IP-DECT Base Station

Configuration

System

Suppl. Serv.

Master

Mobility Master

Radio

Radio config

PARI

SARI

Air Sync

- General
- LAN
- IP
- LDAP
- DECT**
- VoIP
- UNITE
- Central Phonebook
- Administration
- Users
- Device Overview
- DECT Sync
- Traffic
- Gateway
- Backup
- Update
- Diagnostics
- Reset

Enable Supplementary Services

	Activate	Deactivate	Disable
Call Forwarding Unconditional	<input type="text" value="*21*\$#"/>	<input type="text" value="#21#"/>	<input type="checkbox"/>
Call Forwarding Busy	<input type="text" value="*67*\$#"/>	<input type="text" value="#67#"/>	<input type="checkbox"/>
Call Forwarding No Reply	<input type="text" value="*61*\$#"/>	<input type="text" value="#61#"/>	<input type="checkbox"/>
Do Not Disturb	<input type="text" value="*42#"/>	<input type="text" value="#42#"/>	<input type="checkbox"/>
Call Waiting	<input type="text" value="*43#"/>	<input type="text" value="#43#"/>	<input type="checkbox"/>
Call Completion	<input type="text" value="5"/>	<input type="text" value="#37#"/>	<input type="checkbox"/>
Call Park	<input type="text" value="*16\$(1)"/>	<input type="text" value="#16\$(1)"/>	<input type="checkbox"/>
Call Service URI	<input type="text" value="*5\$(1)"/>		<input type="checkbox"/>
Call Service URI (Argument)	<input type="text" value="*7\$(1)\$#"/>		<input type="checkbox"/>
Logout User	<input type="text" value="#11*\$#"/>		<input type="checkbox"/>
Clear Local Setting	<input type="text" value="*00#"/>		<input type="checkbox"/>
MWI Mode	<input type="text" value="Both numbers users dependent"/>		
Local Clear of MWI	<input type="text" value="1000"/>		
External Idle Display			<input type="checkbox"/>

LDAP Configuration

IP-DECT Base Station

Configuration
Server
Server-Status
Replicator
Replicator-Status
Expert

General

LAN

IP

LDAP

DECT

VoIP

UNITE

Central Phonebook

Administration

Users

Device Overview

DECT Sync

Traffic

Gateway

Backup

Update

Diagnostics

Reset

Replication Type

Type Full Replication

Full Replication

Enable

Server 10.11.24.244

Alt. Server

DN cn=PBX0 [Show options...](#)

Filter Type Dect Gateway Name

DECT Gateway Name

User ipdect

Password *****

Use TLS

OK
Cancel

User Configuration

IP-DECT Base Station

Configuration
Users
Anonymous

General

LAN

IP

LDAP

DECT

VoIP

UNITE

Central Phonebook

Administration

Users

Device Overview

DECT Sync

Traffic

Gateway

Backup

Update

Diagnostics

Reset

Long Name	Master Id
PARK	31100363021103
PARK	24100365522
3rd pty	
Master Id	0

[show](#)
[new](#)
[import](#)
[export](#)

Users: 4, Reg

Long Name serak 9900

Display Name 9900

Name 9900

Number 9900

Auth. Name (SIP only)

Password *****

Confirm Password *****

IPEI / IPDI 002020904856

Idle Display 9900

Auth. Code

Feature Status

OK
Apply
Delete
Unsubs.
Cancel

APPENDIX B: DETAILED TEST RECORDS

IP-DECT

Pass	85
Fail	0
Comments	3
Untested	16
Total	104



Test

Record-Innovaphone

Miscellaneous

Please refer to IP-DECT test specifications available on the Ascom Extranet for detailed information regarding each test case.

See URL (requires login):

<https://www.ascom-ws.com/AscomPartnerWeb/en/startpage/Sales-tools/Interoperability>

Document History

Rev	Date	Author	Description
PA1	5.10.2012	SERAK	Initial draft
PA2	15.10.2012	SERAK	
PA3	18.10.2012	SERAK	Supp Serv Figure updated
PA4	22.10.2012	SERAK	IPBS config removed